The Aim:

To provide a low cost 10MHz reference for VHF through microwave equipment

George VK4AMG

VK4AMG GippsTech 2019

GPS Disciplined Frequency Reference Traps for the Young and not so Young

"The 'flavor of the month' seems to be GPS locking of radio frequency"

Paper addressed:

- Requirements of frequency locking
- Alternative solutions for locking
- Limitations

Conclusions:

- GPS disciplining lock solutions have short comings
- Locking to high stability 10MHz reference = BEST
- GPS provides advantages if GPS is available

George VK4AMG

GPS Disciplined Frequency Reference Traps for the Young and not so Young

VK4AMG GippsTech 2019

- Many implementations have major weaknesses:
 - Long settling times
 - Wandering during initial disciplining
 - Loss of stability if GPS signal was lost
 - Lack of status Valid GPS, state of discipline

Why Lock?

10 MHz Frequency Reference

Frequency Accuracy

So the other station can find me when I call on sked

Within 100 Hz up to 1296MHz

and

when operating in digital modes

To be on specific frequency

To be reported correctly in reverse beaconing

Frequency Stability

So my SSB / CW signal is clear and interference free So others optimum decode digital modes

Preferably better than 10Hz

decode software is time and frequency critical

So decoding other's digital transmission is not degraded

For all operating conditions;

Voltage, ambient temperature, power output, SWR, radio temperature, fan on/off

George VK4AMG

Requirements

Provide a low cost 10MHz reference for a complete shack and rover

```
 Excellent stability
 10ppb (0.1Hz)
```

- High accuracy100ppb (1Hz)
- Sine wave output > 1 Vp-p (+4dBm)
- Low phase noise better than -140dBc/Hz at > 100Hz
- Fast warmup5mins
- Multiple outputs (four or more)
- Wide power supply range 12 28Vdc
- Low power consumption < 0.5A @ 12V
- Small footprint
- Boxed or Unboxed for mounting in equipment

George VK4AMG

Requirements


GPS Discipline Features:

- GPS disciplining Accuracy < 5ppb (0.05Hz)
- PC time synchronisation and location and heading calculation

GPS Discipline Version MUST:


- Not degrade warmup time and stability
- Provide status of warmup, GPS availability, discipline progress, locked
- Not degrade accuracy and stability when GPS not available

George VK4AMG

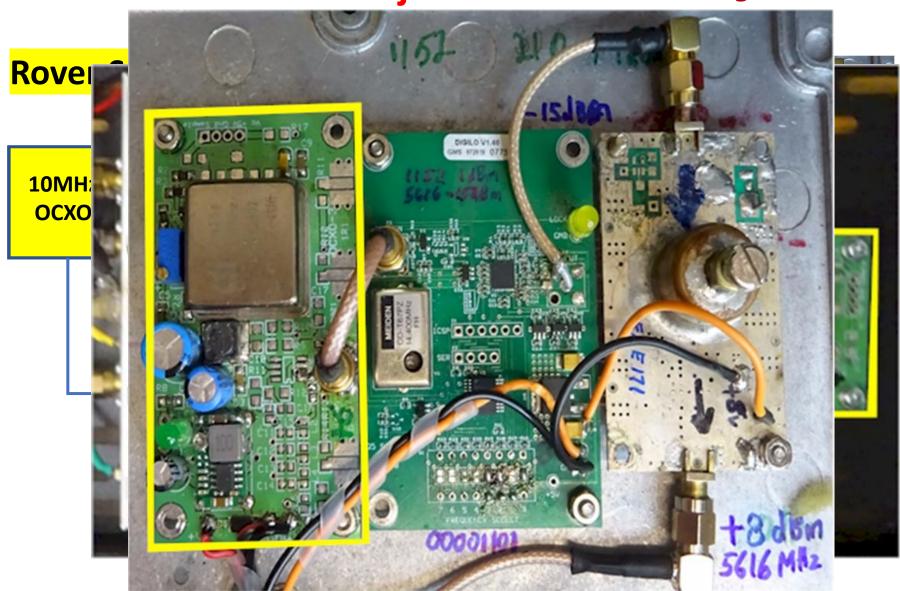

George VK4AMG

Extended Rover Station Solution

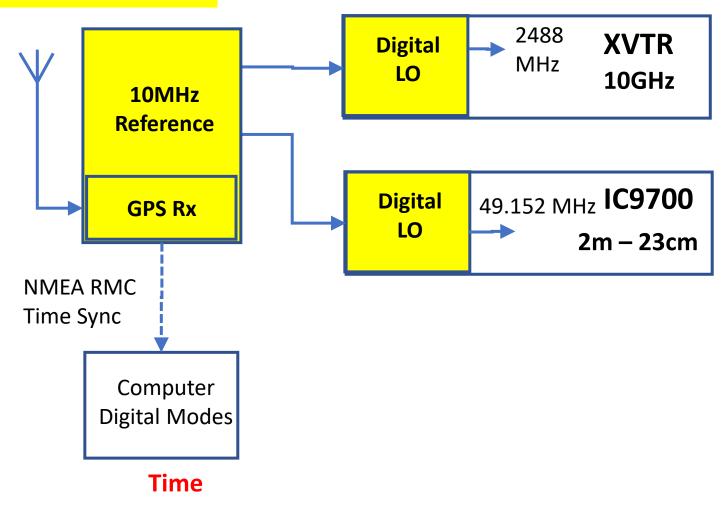

George VK4AMG



17/05/2024

9

George VK4AMG

10 MHz OCXO Reference Generator

OCXO-3 Rev 1.1

The Products

GPS Disciplined 10 MHz Reference Generator

GPSD-1 Rev 1.0





10 MHz OCXO Reference Generator

OCXO-3 Rev 1.1



Oven Controlled Crystal Oscillator

Operates from a supply of 12 to 28V dc

Four SMA outputs.

One additional output may be added

Calibrated for 10000000.0 Hz

Startup 500mA @ 12V dc

(c) VK4AMG 2022


Settled @12V <250mA; @ 26V <150mA.

Sine or square wave > 8 dBm.

11

10 MHz OCXO Reference Generator

OCXO-3 Rev 1.1

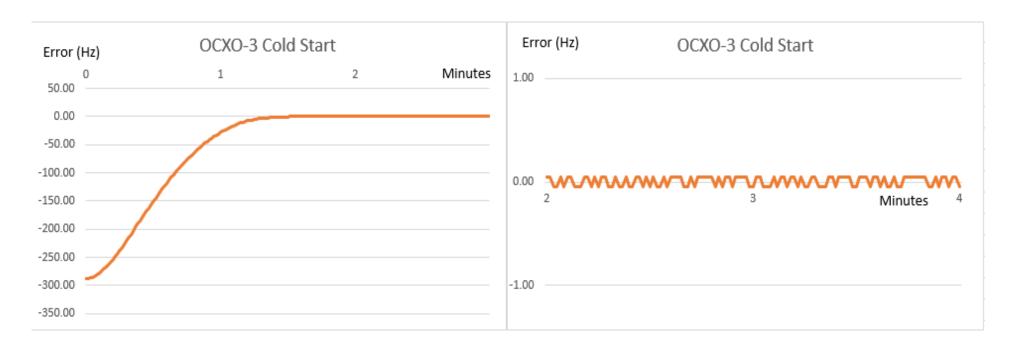

CTI OSC5AB02 oven-controlled crystal oscillator

Warmup < 2 mins

Stability $< 10 \text{ ppb } (0.1 \text{Hz}) \text{ at } 0^{\circ}\text{C} \text{ to } 45^{\circ}\text{C}.$

Accuracy Ageing < 100 ppb per year (1Hz) < 400ppb over 10 years.

Phase noise

- -80dBc/Hz@1Hz
- -120dBc/Hz@10Hz
- -140dBc/Hz@100Hz
- -145dBc/Hz@ 1kHz.

GPS Disciplined 10 MHz Reference Generator

GPSD-1 Rev 1.0



100 x 50 x 25 mm

u-Blox Neo6 GPS receiver Arduino Nano microprocessor Supervise and discipline a high stablility OCXO.

- GPS & uP disciplined 10MHz OCXO
- Provide accurate and stable frequency locking
- Four outputs
 One additional output may be added
- Sine or square wave
- Operates from a supply of 12 to 28V dc
- Startup 0.5A @ 12V dc
- Settled @12V <300mA; @ 26V <170mA.

GPS Disciplined 10 MHz Reference Generator

GPSD-1 Rev 1.0




Status displayed on four LEDs:

- Power (Green) indicates unit is operating;
- 1PPS (Blue) GPS locked and producing 1PPS
- Warn (Red) steady during warm-up
 - long during coarse discipline or error
 - fast during fine discipline
 - o off when accurate and stable ± 0.1Hz
- OK (Green) reference is GPS locked

NMEA RMC sentence at 9600 baud via serial USB PC time synchronisation, grid square calculations, or beam headings

GPS Disciplined 10 MHz Reference Generator

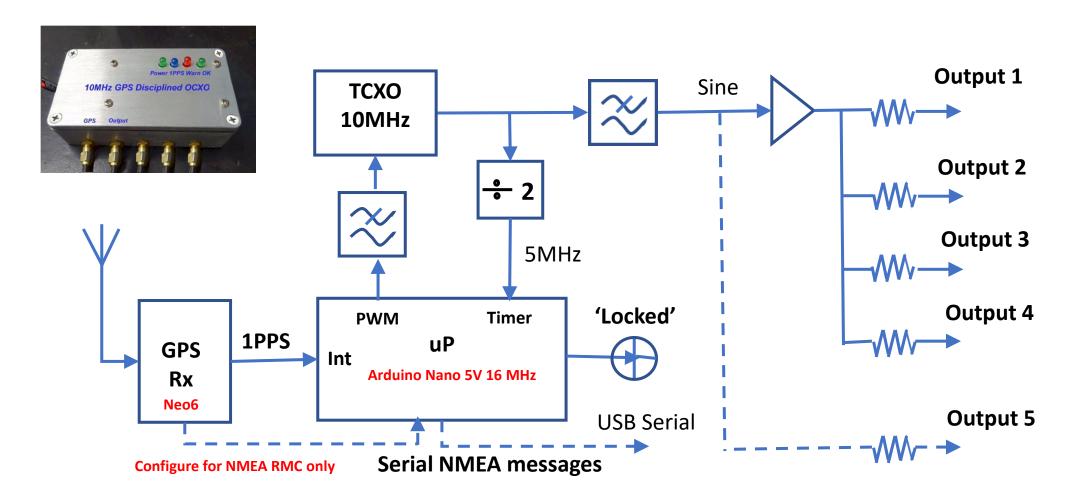

What makes the George VK4AMG OCXO Different ?

- Low cost High Stability Fast Warmup OCXO
- Calibrated against GPS disciplined GPSD-01 < 1Hz for years
- Wide range power supply 12 to 28 Vdc
- Sine or Square alternative at manufacture
- Four +8 dBm Outputs
- Low power startup <500mA @12V <300mA @26V startup
- Low power Consumption <150mA @12V <250mA @26V startup

Slide

What makes the George VK4AMG OCXO

Different ?

- Low cost High Stability Fast Warmup OCXO
- Calibrated against GPS disciplined GPSD-01

< 1Hz for years

Wide range power supply 12 to 28 Vdc





Slide

17

What makes the George VK4AMG GPSD Different ?

Builds on Low Cost Stable Low Consumption OCX0-3 Features Adds Neo6 GPS Receiver and Arduino Nano Microprocessor

- Previous calibration values used at start-up No wandering or instability
- No GPS discipline until after start-up delay and valid GPS lock
- Frequency is measured against GPS 1PPS timing pulses over 30 sec periods
- No "coarse" discipline adjustments applied until large error confirmed
- Frequency for "fine" calculated over ten count periods (rolling error)
- "Fine" discipline adjustments applied in steps transparent to digital operation
- LED status indicators for Power; GPS valid; Frequency accuracy; and Reference locked
- USB serial broadcast of NMEA RMS sentences for time, location, and bearing calculation
- Provides supply for active GPS antenna
- Packaged in diecast aluminium shielded enclosure

These product have been further developed and are available from City of Brisbane Radio Society shop

https://brisbaneradiosociety.net/10-mhz-reference-by-vk4amg/





DAMP-3

OCXO-3



GPSD-2