

GI-7b/GI-70b/GI-7bT




Microwave Triode

The GI-7b, GI-70b and GI-7bT microwave triode operates as an oscillator or an amplifier in continuous-wave or pulsed mode with anode modulation in the centimetric and decimetric wavelength ranges. The GI-7"b" is available in two variants differing in the type of cooling: the GI-7b with a heat sink for forced air cooling and the GI-70b with no heat sink for other systems of cooling. The GI-7b is physically identical to the GI-6b and GS-9b, although there are electrical differences. The GI-7bT comes with heat sink only, is more shock- and vibration-proof, and has a larger ceramic structure. It is designed to be used in Tanks. The "bT" varies in a few parameters from the "b", and these variations are noted in the tables below. As with most Russian power triodes, the heat sink on the GI-7b & GI-7bT is removable.


NOTE: Myriad tests have been conducted regarding the use of this tube for PAs at 23cm. It is possible to derive a stable output of up to approximately 250W from a single tube GI7B cavity PA, and designs for such PAs can be found on this web site. Even with outstanding cooling, higher powers result in severe thermal drift problems. The most forgiving design is by OK1KIR, because it uses a 1/4 w.l. anode cavity which is quite broadbanded compared with the 3/4 w.l. cavities normally used. Even the extensive additional cooling measures used in the OK1KIR design do not solve the thermal drift problems. Additionally, this design will not accept the GI7BT due to physical limitations imposed by internal cavity dimensions. In short, the GI7's internal dimensions are simply too big (too large in terms of electrical wave length) to allow this tube to be used effectively at 23cm. The GI7 IS, however, well suited for use in single and multiple-tube PAs from HF through 70cm, and designs for such PAs are also on this web site (with more added as found!).

[back](#)

GENERAL	
Cathode: indirectly heated, dispenser, oxide-coated.	
Envelope: metal-ceramic.	
Cooling: 24 m ³ /hr forced air (GI-7bT; 27 m ³ /hr). For 350W dissipation, 40 m ³ /hr is required by all!	
Height, mm, at most:	with heat sink: 110.5
	without heat sink: 97
Diameter, mm, at most:	with heat sink: 65
	without heat sink: 36.3+
Mass, gm, at most:	with heat sink: 330
	without heat sink: 170

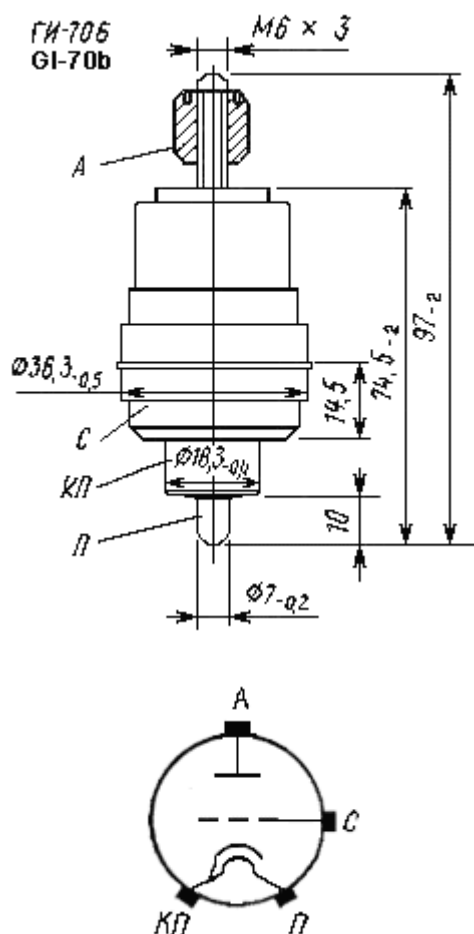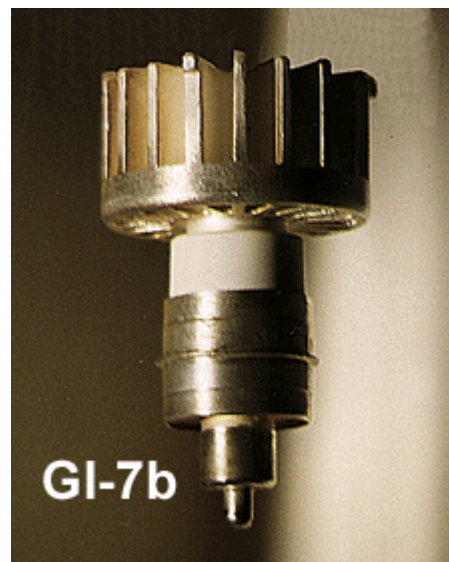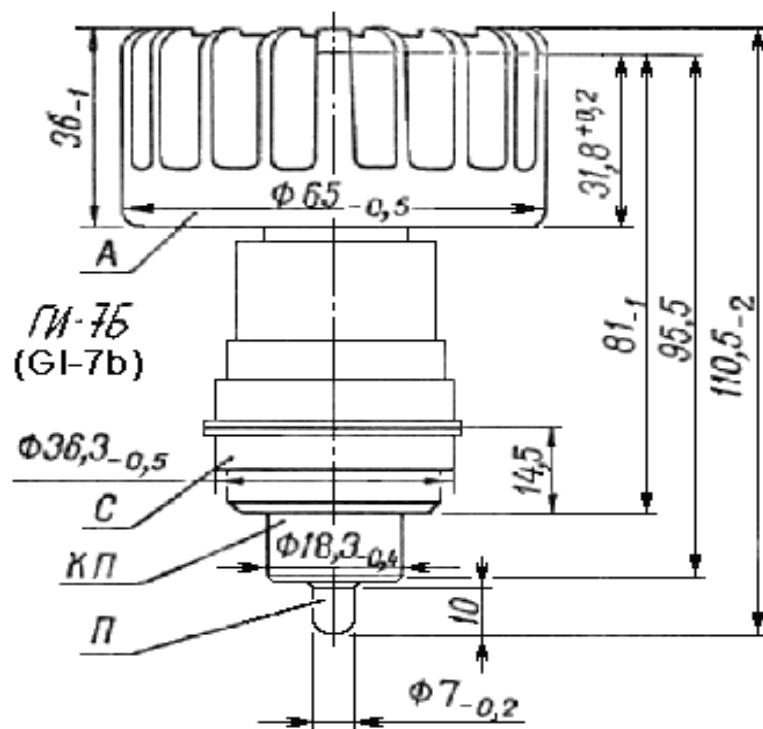

Note the physical difference of the GI-7bT compared to the GI-7b is in the "ceramic" portion of the body; 47mm diameter instead of a bit less than 36mm!

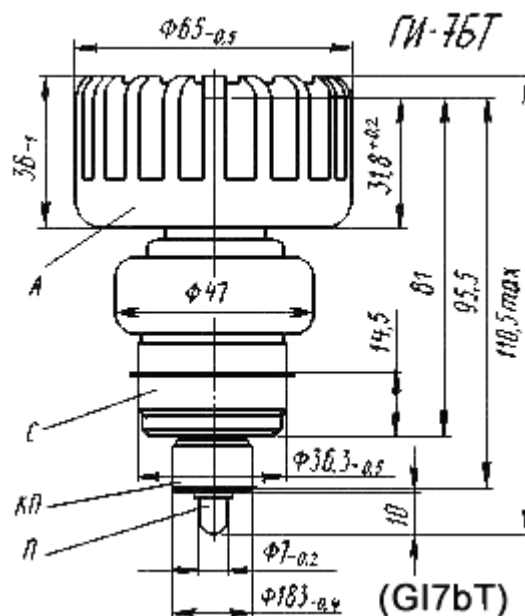

A - anode; C - grid; KP - cathode and heater;
P - heater

OPERATING ENVIRONMENTAL CONDITIONS


Vibration loads:

frequency, Hz	5-600
acceleration, m/s ²	59
Multiple loads with acceleration, m/s ²	342

Single impacts with acceleration, m/s ²	1,465
Linear loads with acceleration, m/s ²	490
Ambient Conditions:	
Temperature, °C	-60 to +100
Relative humidity at up to +40 °C, %	95-98



NOMINAL ELECTRICAL PARAMETERS	
Heater voltage, V	12.6
Heater current, A	1.925
Mutual conductance ($V_a = 1.2$ kV, $I_a = 150$ mA, change in $V_g = 1$ V), mA/V:	>23
Operating point (negative V_g with $V_a = 1.3$ KV, $I_a = 150$ mA), V:	10
input capacitance, pF:	11.1
output capacitance, pF:	4.6
transfer capacitance, pF:	0.075
Warm up time ($V_a = 400$ V), at most	90
Output, CW operation ($V_a = 1.05$ KV, $I_a = 300$ mA, wavelength 18.5 cm), W (6I7b / 6I7bT):	>30 / >40
Output in pulsed operation (at peak $V_a = 9$ KV, $I_a = 7.5$ A, wavelength 10 cm, 1/pulse duty factor 1,400-150, pulse duration 3-10 μ s), KW (6I7b / 6I7bT):	>11 / >12
Designed Tube Life (hours)	>650

ELECTRICAL PARAMETER LIMITS	
Heater voltage, V	12-13.2
Heater current, A	1.8-2.05
Mutual conductance ($V_a = 1.2$ kV, $I_a = 150$ mA, change in $V_g = 1$ V), mA/V:	20-26
Operating point (negative V_g with $V_a = 1.3$ KV, $I_a = 150$ mA), V	7.5-12.5
input capacitance, pF	10-12.2
output capacitance, pF (6I7b / 6I7bT):	4-5.2 / 4.2-5.0
transfer capacitance, pF:	0.055-0.095
Maximum CW Anode voltage (V_a), KV:	2.5
Maximum Instantaneous value Anode voltage (V_a), KV:	5
Instantaneous value Grid voltage (V_g), V	-400 to +80
Maximum CW Cathode current (I_c), r.m.s./key down, A	0.6 / 0.4
Anode Dissipation, W:	350
Grid Dissipation, W:	7
Temperature at anode lead, °C	200
Temperature at radiator, °C	160
Temperature at cathode leads, °C	100
Temperature at grid leads, °C	200
Temperature at external ceramic parts, °C	250
Minimum wavelength in CW operation, cm	10
Minimum wavelength in pulsed operation, cm	9

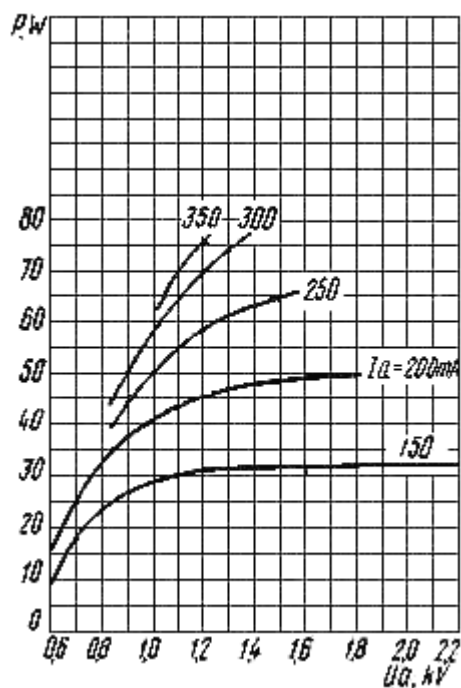


Averaged Anode Characteristic Curves:
 $U_f = 12.6V$



Air
 m^3/hr

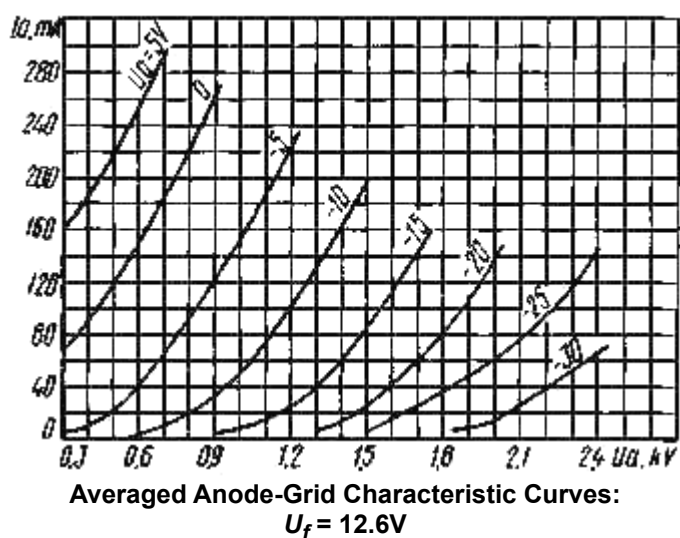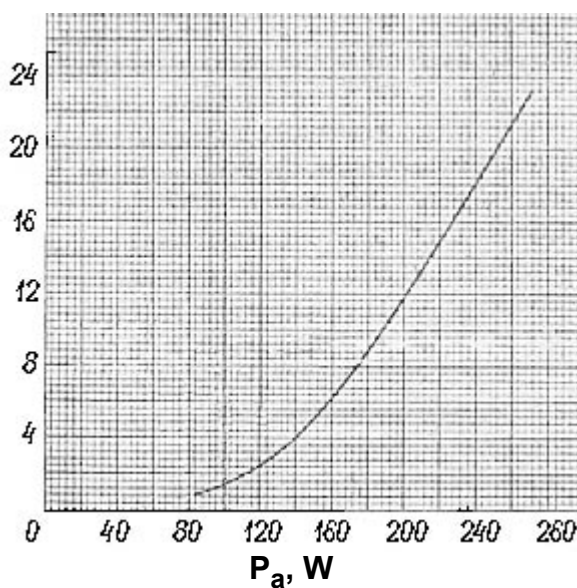

Averaged Anode-Grid Characteristic Curves:
 $U_f = 12.6V$

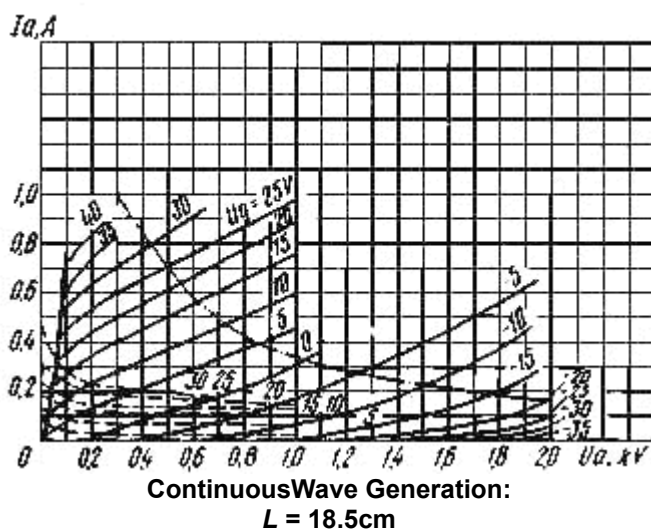

Continuous Wave Generation:
 $L = 18.5cm$

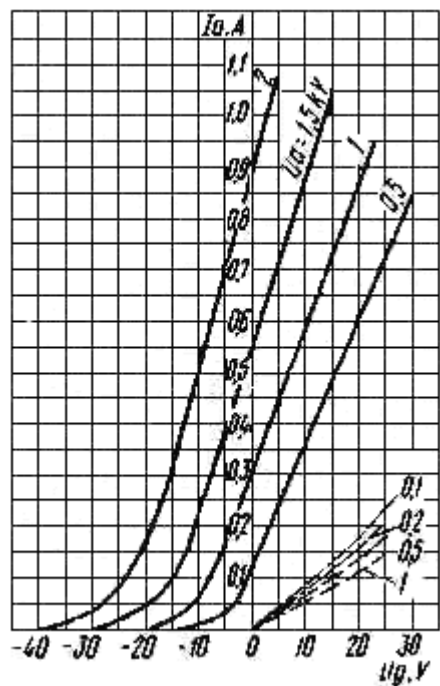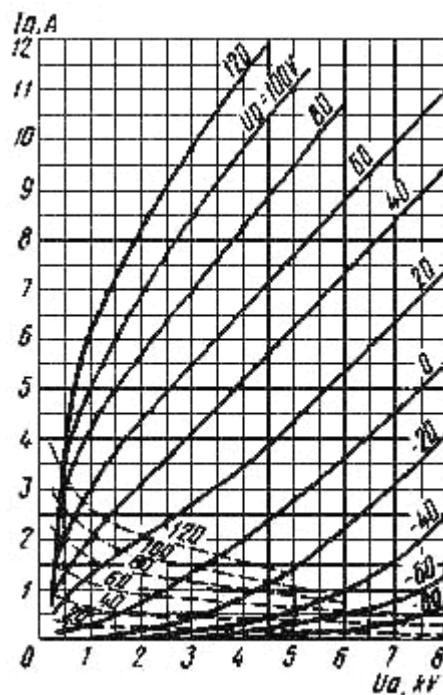

Averaged Anode Characteristic Curves:

$U_f = 12.6V$;

— anode;

--- grid-anode;